

3DGV - 3 DIMENSIONAL GEOPATHIC VORTEX

INTERIOR GEOPATHIC REVERSALS

Principle

The 3D-GV controls and diverts the negative geostresses like Hartmann fields, Curry lines, Ley lines, etc. It counters the bio morphic fields by capturing the current and past stresses affecting human body from all 3 directions and releasing the embedded information from the environment related to geo-pathic stress.

Application

- Very effective in higher intensity geo stresses.
- Only for interior use in homes and workplaces.
- Covers around 1000 square meter diameter in all the three planes.

Installation

- Kept on a higher base and connected inside the wall through a wire and an anchor.
- The anchor is drilled or hammered along with a fastener to achieve proper earthing.




3-Dimensional Geopathic Vortex

Size: 13 in x 13 in x 13 in


Interior use | Direct Earthing | Energy conversion | 1000 Sq. m. range

Working

- The 3D-GV is kept in a cylindrical dome with holes in it to let the energy in.
- All the geopathic energies from the atmosphere are sucked by the 3D-GV and circulated inside it.
- Negative geopathic energies are converted to positive energy once they reach the base plate.
- The wooden rod attached under the swastika to the base plate takes the energy from top to bottom.
- The base plate is connected inside the wall using a wire and an anchor.
- The converted positive energy reaches the base plate and is transferred to the earth.

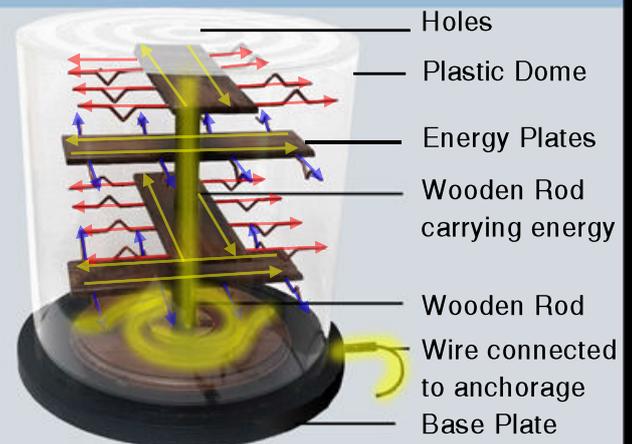

Energy flow in 3D-GV

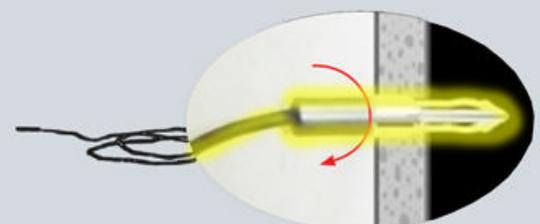

Anchorage in wall for earthing

Note: Detailed description regarding the product and installation is given in the manual

For more information contact - +91 9822573102, www.vastuworld.com